


ZD Series Active Differential Probes 1.5 GHz, 1 GHz, and 500 MHz

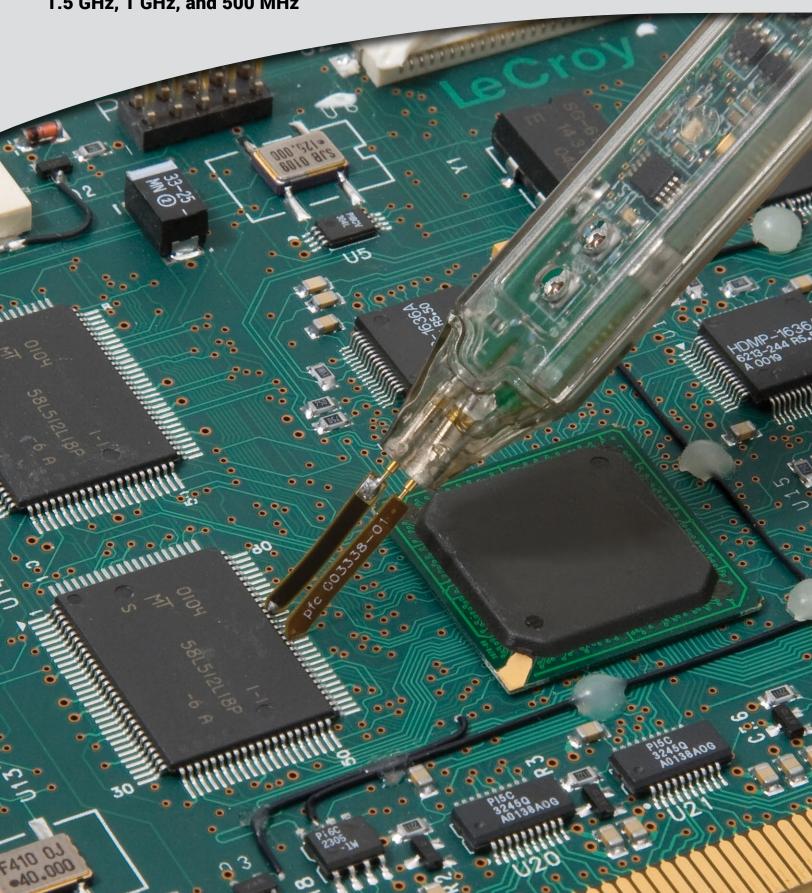

The ZD Series probes provide wide dynamic range, excellent noise and loading performance and an extensive set of probe tips, leads, and ground accessories to handle a wide range of probing scenarios. The low 1 pF capacitance means this probe is ideal for all frequencies. The ZD Series differential probes provide full system bandwidth for all Teledyne LeCroy Oscilloscopes 1.5 GHz and lower.

Fully Integrated


With the ProBus interface, the ZD500, 1000, and 1500 becomes an integral part of the oscilloscope. All probe gain and offset controls are transparent to the user, making it easier to probe the circuit without concern for which gain setting to choose. When used with a Teledyne LeCroy digital oscilloscope, no external power supply is required.

Wide Dynamic Range

The ZD500, 1000, 1500 probes provides transparent probe attenuation so signals are always optimized for the display. The differential range is 18 Vp-p with a differential offset of ±8 and common mode range of ±10 V, making this versatile for every probing application.

Wide Applications

The wide dynamic range of 16 Vp-p and offset range of ±8 suit this probe to a wide range of applications and signal types. The ZD differential probes are ideally suited for Automotive, Serial Data, power, and general purpose use.

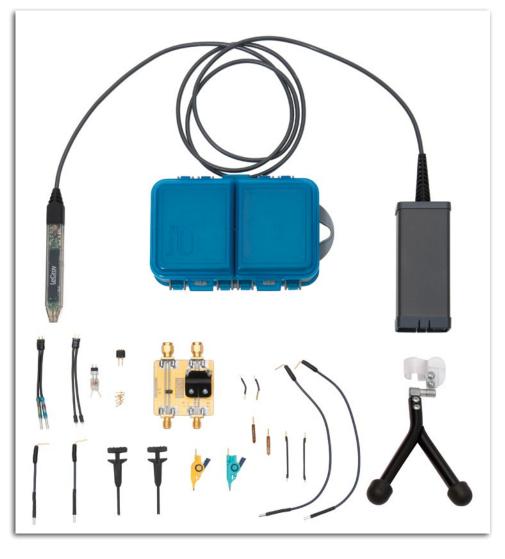

The differential input capacitance is only 1 pF to minimize loading distortion on the highest frequency signals under test. System noise of only 4 mVrms allows accurate measurement of the smallest signals.

A Variety of Probe Tips for Varied Tasks


Engineers often need to probe a variety of different test points in confined spaces. The extensive range of standard tip accessories for the ZD Series of probes ensures that this probe can meet any difficult probing challenge.

Innovative Probe Leads and Tips Provide Excellent Signal Performance Without Degradation

Probing with long leads or accessories is sometimes necessary to reach the test points, but it comes at the expense of reduced bandwidth, increased capacitance, and added noise. The ZD accessories are engineered to provide the best signal fidelity without ringing or distortions commonly introduced with tip accessories.



The Swivel Tip adapter can be adjusted to probe test points ranging from 0 to .300" apart with Z-Axis compliance.

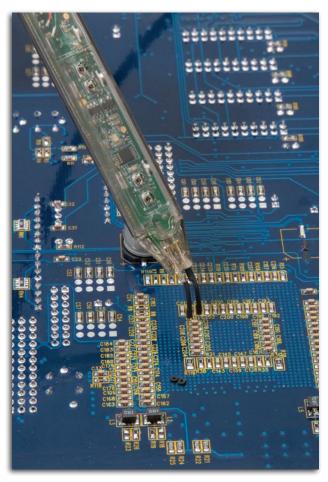

The short spring loaded ground leads can be used as either a ground accessory or an extension of the probe inputs.



The IC leads with a compensation resistor provide excellent signal fidelity when probing pins of an IC. One side of each blade is insulated to prevent shorting the signal to the adjacent pin.


SPECIFICATIONS AND ORDERING INFORMATION

Specifications	ZD1500	ZD1000	ZD500	
Electrical Characteristics				
Bandwidth (Warranted)	1500 MHz	1000 MHz	500 MHz	
Bandwidth (Typical)	1700 MHz	1200 MHz	650 MHz	
Risetime 10-90% (Typical)	270 ps	375 ps	650 ps	
Risetime 20-80% (Typical)	200 ps	280 ps	500 ps	
LF Attenuation Accuracy (Warranted)		2%		
Zero Offset (Typical) (within 15 minutes after autozero)		5 mV		
System Noise (Typical)	1.75 mVrms	1.75 mV _{rms}	1.3 mV _{rms}	
Probe Noise Density (Typical)		38 nV/rt (Hz)		
Input Differential Range (Nominal)	±8 V (16 V _P -p)			
<u>Differential Offset Range (Nominal)</u>	±18 V			
Offset Gain Accuracy (Typical)	2%			
Common Mode Range (Nominal)		±10 V		
Maximum Non-destruct Voltage (Nominal)		30 V		
CMRR (Typical)	60 dB 50/60 Hz 30 dB 20 MHz 25 dB @ 1500 MHz	60 dB 50/60 Hz 30 dB 20 MHz 25 dB @ 1000 MHz	60 dB 50/60 Hz 30 dB 20 MHz 25 dB 500 MHz	
DC Input Resistance (Nominal)		50 k Ω (Common Mode) 120 k Ω (Differential Mode)		
Differential Input Capacitance (Typical)		< 1.0 pF		

Ordering Information

Product Description	Product Code	Product Description	Product Code
500 MHz, 1.0 pF Active Differential Probe, ±8 V	ZD500	Right Angle Connector Long, Qty 2	PACC-LD004
1 GHz, 1.0 pF Active Differential Probe, ±8 V	ZD1000	Micrograbber, Qty 2	PK006-4
1.5 GHz, 1.0 pF Active Differential Probe, ±8 V	ZD1500	Minigrabber, Qty 2	PACC-CL001
		Short Spring Loaded Bendable Ground, Qty 2	PACC-CD008
Standard Accessories		Probe Calibration Fixture, Qty 1	PCF200
Y Lead Adapter, Qty 1	PACC-ZD001	ZD Replacement Kit	PK111
Solder-In Lead, Qty 2	PACC-ZD002	Hands Free Probe Holder, Qty1	PACC-MS001
Long Spring Loaded Bendable Ground, Qty 2	PACC-ZD003		
Tip Saver, Qty 2	PACC-ZD004	Customer Service	
Swivel Tip Adapter	PACC-ZD005	Teledyne LeCroy oscilloscopes and probes are designed, built, and tested	
Small IC Adapter, Qty 2	PACC-ZD006	to ensure high reliability. In the unlikely event you expe	
Micro Pogo Pin Tip, Qty 6	PACC-ZD009	our digital oscilloscopes are fully warranted for three y	ears and our probes
		are warranted for analyser	

PACC-LD003



This warranty includes:

- No charge for return shipping
- Long-term 7-year support
- Upgrade to latest software at no charge




Right Angle Connector Short, Qty 2

1-800-5-LeCroy teledynelecroy.com Local sales offices are located throughout the world. Visit our website to find the most convenient location.



ZD200 Active Differential Probes 200 MHz

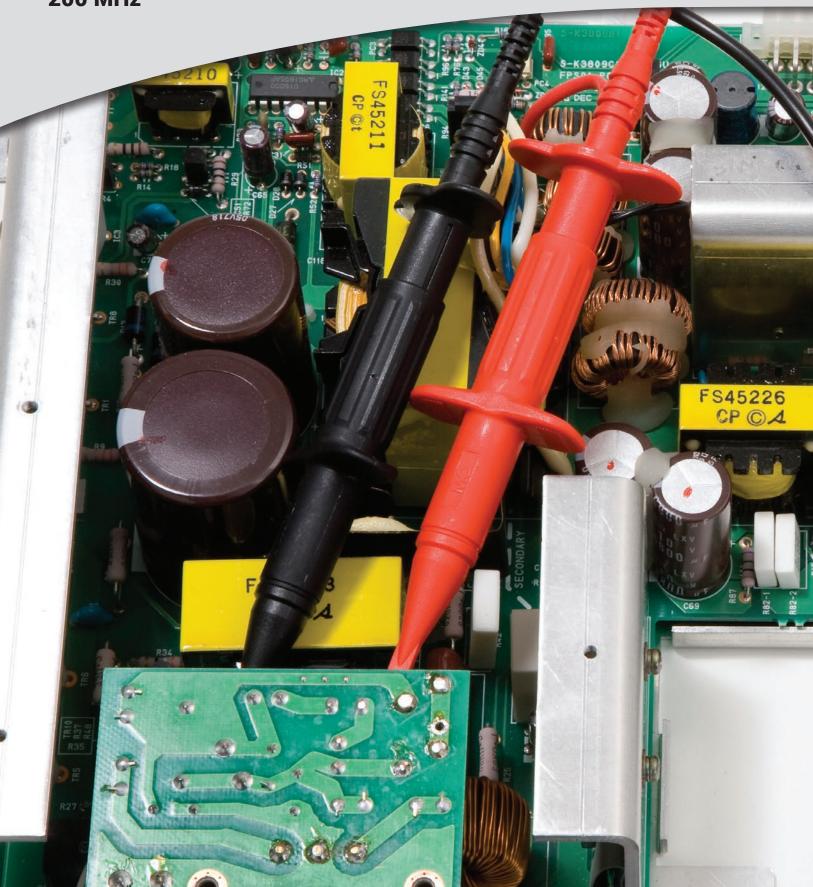

The ZD200 differential probe provides excellent noise and loading performance with an extensive set of probe tips, leads, and ground accessories to handle a wide range of probing scenarios.

Fully Integrated

With the ProBus interface, the ZD200 becomes an integral part of the oscilloscope. The probe sensitivity and offset are automatically optimized based on the oscilloscope gain settings, so control is transparent to the user. When used with a Teledyne LeCroy digital oscilloscope, no external power supply is required.

Wide Dynamic Range

The ZD200 probes provide a wide dynamic range of ±20 V and a common mode rage of ±60 V to allow a broad application use.

A Variety of Probe Tips for Varied Tasks

Engineers often need to probe a variety of different test points in confined spaces. The extensive range of standard and optional tip accessories for the ZD200 Series of probes ensures that this probe can meet any difficult probing challenge.


Innovative Probe Leads and Tips Provide Excellent Signal Performance Without Degradation

Probing with long leads or accessories is sometimes necessary to reach the test points, but it comes at the expense of reduced bandwidth, increased capacitance, and added noise. The ZD200 accessories are engineered to provide the best signal fidelity and minimize peaking and other undesirable effects often introduced with probe tips and leads.





The ZD200 provides 2 closely spaced differential inputs to connect directly to header pins, or connect probe tips or leads.

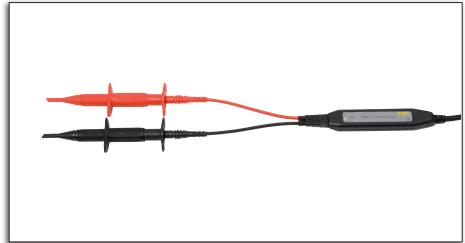

The ZD200 connects to the Y lead accessory and clips.



The ZD200 Accessory kit includes an assortment of leads, clips, and straight tips.

SPECIFICATIONS AND ORDERING INFORMATION

Specifications ZD200

Electrical Characteristics

Bandwidth (Warranted)	200 MHz	
Risetime 10–90% (Typical)	1.75 ns	
Probe Attenuation (Nominal)	10x	
LF Attenuation Accuracy (Warranted)	1%	
Input Offset (Typical)	< 2 mV	
Probe Only Noise (Typical)	3 mV _{rms}	
Input Differential Range (Nominal)	± 20 V	
Common Mode Range (Nominal)	± 60 V	
CMRR (Typical)	80 dB @ 60 Hz 50 dB@10 MHz	
DC Input Resistance (Nominal)	250 kΩ (Common Mode) 1 MΩ (Differential Mode)	
Input Capacitance (Differential) (Typical)	3.5 pF	

Ordering Information

Product Description	Product Code ZD200	
200 MHz, 3.5 pF, 1 MΩ Active Differential Probe		
Replacement Accessory Kit for ZD200	PACC-ZD007	
Replacement Leadset for ZD200	PACC-ZD008	

Customer Service

Teledyne LeCroy oscilloscopes and probes are designed, built, and tested to ensure high reliability. In the unlikely event you experience difficulties, our digital oscilloscopes are fully warranted for three years and our probes are warranted for one year.

This warranty includes:

- No charge for return shipping
- Long-term 7-year support
- Upgrade to latest software at no charge



1-800-5-LeCroy teledynelecroy.com

Local sales offices are located throughout the world. Visit our website to find the most convenient location.